

HYCON HWP2 SUBMERSIBLE PUMP

IDEAL FOR SMALL MANHOLES AND TIGHT SPACES

HANDLES DIRTY WATER AND SOLIDS



PRODUCT FEATURES

Although small and light, the HWP2 pump can pump up to 50 m³/h. The outside diameter is only 23.8 cm making it ideal for small manholes where the space is tight.

The pump is unaffected by dirty water and solids. In utility


and construction, heavy-duty pumps are necessary to secure no downtime at the job site. The direct drive motor ensures an all-day, everyday operation without damage to the engine or the seals if the pump runs dry.

HYDRAULIC SUBMERSIBLE PUMP HWP2 C €

Item no.	3030002
10 m discharge hose with couplings	4032697
Weight [kg / lbs]	7.7 / 17
Dimensions L x W x H [mm]	235 x 183 x 363
Oil flow [LPM]	20 - 30 / 5 - 8
Max pressure [bar]	172
Max flow capacity [m3/h]	50
Max head [m]	30
Max size of solid particles Ø [mm / inch]	38
Outlet size and connection, female thread	BSP 2"

PLEASE NOTE: Discharge Hose is not included.

HYCON HWP2 PERFORMANCE CURVE

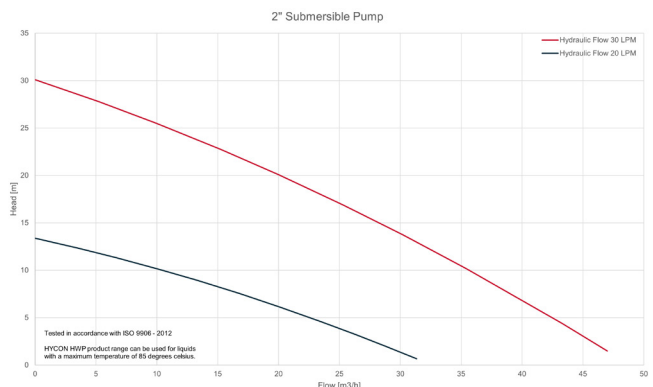

THE HYCON PRODUCT RANGE

CUT-OFF AND HAND SAWS · RING AND POWER SAWS · CORE DRILLS · POST DRIVERS · PICK HAMMER
LIGHT & HEAVY DUTY BREAKERS · SUBMERSIBLE PUMPS · ROCK DRILLS · UNDERWATER EQUIPMENT
GASOLINE, DIESEL AND ELECTRIC POWER PACKS



HYCON A/S
Juelstrupparken 11
DK-9530 Støvring

Tel.: +45 9647 5200
Mail: hycon@hycon.com
www.hycon.com

DISTRIBUTOR: