



727 RBI-FA



EN 14439-C25
FEM 1.001-A3
2000/14/CE



Simple setup



FM-Link



Power Control



ASsys



ACsys

Funzionamento e trasporto

Operation and transport - Betrieb und transport - Exploitation et transport - Accionamiento y transporte

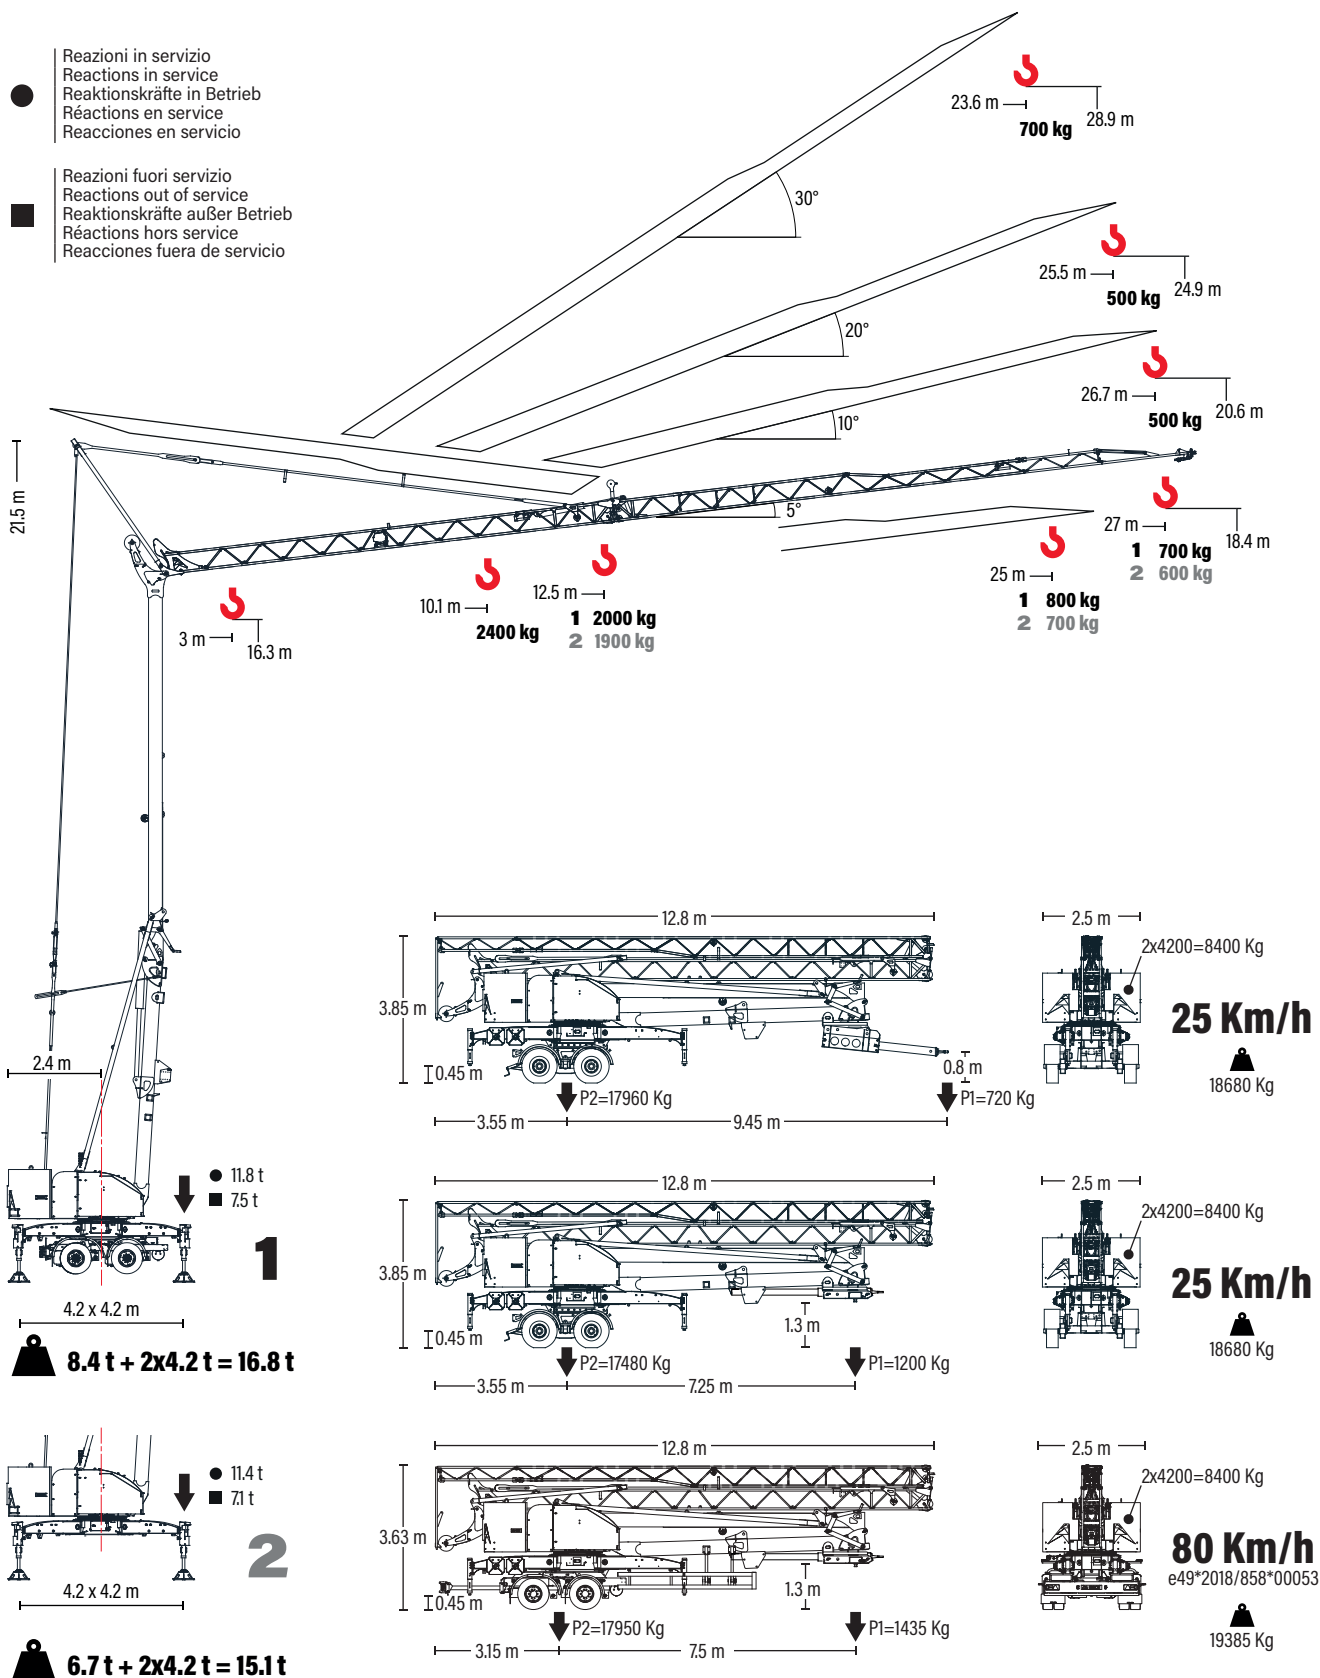


Diagramma di portate

Load diagram - Lastkurven - Courbes de charges - Curvas de cargas

1

400 V - 230 V		m	3	10	12	12.5	14	16	18	20	22	24	25	26	27
27 m	2.4 t - 9.9 m	t	2.40	2.37	1.89	1.80	1.56	1.33	1.15	1.01	0.90	0.81	0.77	0.73	0.70
25 m	2.4 t - 10.2 m	t	2.40		1.96	1.86	1.62	1.38	1.19	1.05	0.94	0.84	0.80		
12.5 m	2.4 t - 10.8 m	t	2.40		2.10	2.00									

400 V - 230 V		m	3	26.3
26.3 m	0.5 t - 26.3 m	t	0.50	

400 V - 230 V		m	3	25
25 m	0.5 t - 25 m	t	0.50	

400 V - 230 V		m	3	10	12	14	16	18	20	21.9	22	23.6
23.6 m	2.4 t - 8.8 m	t	2.40	2.04	1.62	1.34	1.13	0.98	0.86	0.77	0.76	0.70
21.9 m	2.4 t - 9 m	t	2.40	2.11	1.68	1.39	1.18	1.02	0.90	0.80		

2

400 V - 230 V		m	3	10	12	12.5	14	16	18	20	22	24	25	26	27
27 m	2.4 t - 8.9 m	t	2.40	2.07	1.64	1.56	1.36	1.15	1.00	0.87	0.78	0.70	0.66	0.63	0.60
25 m	2.4 t - 9.2 m	t	2.40	2.17	1.73	1.64	1.43	1.21	1.05	0.92	0.82	0.74	0.70		
12.5 m	2.4 t - 10.3 m	t	2.40		2.00	1.90									

400 V - 230 V		m	3	26.3
26.3 m	0.5 t - 26.3 m	t	0.50	


400 V - 230 V		m	3	25
25 m	0.5 t - 25 m	t	0.50	


400 V - 230 V		m	3	10	12	14	16	18	20	21.9	22	23.6
23.6 m	2.4 t - 8.8 m	t	2.40	2.04	1.62	1.34	1.13	0.98	0.86	0.77	0.76	0.70
21.9 m	2.4 t - 9 m	t	2.40	2.11	1.68	1.39	1.18	1.02	0.90	0.80		


727 RBI-FA

Meccanismi

Mechanisms - Antriebe - mécanismes - Mecanismos

	V9.32 6.6 kW								
		400 V	m/min	4	13	32	40		
			t	2.4	2.4	1.0	0.6		
		230 V		m/min	4	11	25		35
				4	13	32	40		
		t	2.4	2.4	1.0	0.6			

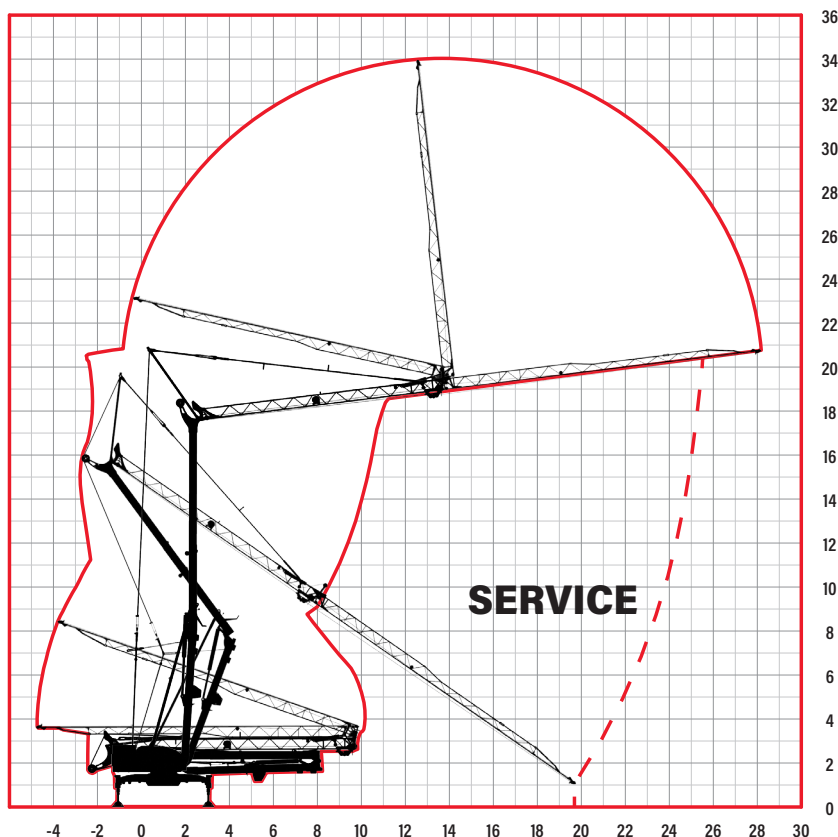
	0 <-> 30 m/min 2.2 kW
---	--------------------------

	0 <-> 0.8 rpm 2.2 kW
---	-------------------------

	230 V - 50 Hz: 3 kW 4.5 kW 6 kW
	400 V - 50 Hz: 8 kW

Montaggio

Erection- Montage - Montage - Montaje



Documento commerciale non contrattuale.
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni.

This commercial document is not legally
binding. For any technical information,
please refer to the corresponding
instructions.

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

Ce document commercial n'est pas
juridiquement contraignant. Pour toute
information technique, veuillez vous référer
aux instructions correspondantes.

Documento comercial no contractual.
Para cualquier información técnica, ver la
noticia correspondiente.

Rif. 15ICA37B37A0 02/2024

